

# LX2031 • 120/277V • XICATO 19MM



## These LED Cylinder units offer high functionality in LSI's smallest, sleekest package.


- Designed for the most versatile Xicato™ XTM LED module up to 16 Watts
- System efficiency up to 46 Lumens/Watt
- Exceeds ANSI specifications by maintaining industry's best color consistency over the 50,000 hour rated life of the LED module
- Tested to LM79 and LM80 Protocols
- 50,000 hour life to 70% lumen output, L70 at 95°F max ambient
- Discreetly hidden driver compatible with various dimmers down to 0.1 %
- Integral Dimmer with built-in potentiometer also available, dimming down to 10%
- Removable housing design allows fixture to be transformed from a wall wash to a spotlight in seconds
- Polycarbonate reflector, spread gel and kicker reflector included
- Broad coverage for a seamless wash of light
- Choice of color temperature
- Choice of Color Rendering Index (CRI) of either 98 (high) or 83+ (standard)
- No UV or IR emissions; no mercury or lead
- Sturdy die-cast aluminum housing
- Self and wrench locking stem for horizontal and vertical focusing
- On/off safety switch (on OE and PT5 Track fitting)
- Internal multiple filter and accessory clips accept size AAA LSI filters and accessories
- Finishes: LSI Black, White, and Silver
- Fixture weight: 1.56 lbs.

## FIXTURE PART NUMBERS


Please review the **ORDERING INFORMATION** section on the next page as well as the **MOUNTING OPTIONS** on page 3 to create a part number for each fixture that specifies the following:

- LED Module
- LED Rating
- Color Temperature
- Fitting/Controls (Dimming)
- Voltage
- Finish

### PART NUMBER

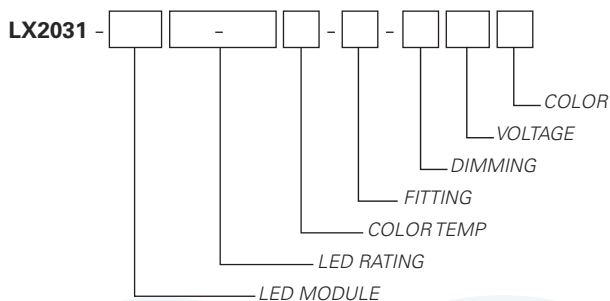

Example Part Number: **LX2031-T1910-9830-0E-TE120W** is a fixture with a Xicato 19mm LED module, 1050 Lumen/98 CRI/14 Watt LED rating, 3000°K Color Temperature, 0E Track fitting with Trailing Edge group dimming capability, 120V and a White finish.

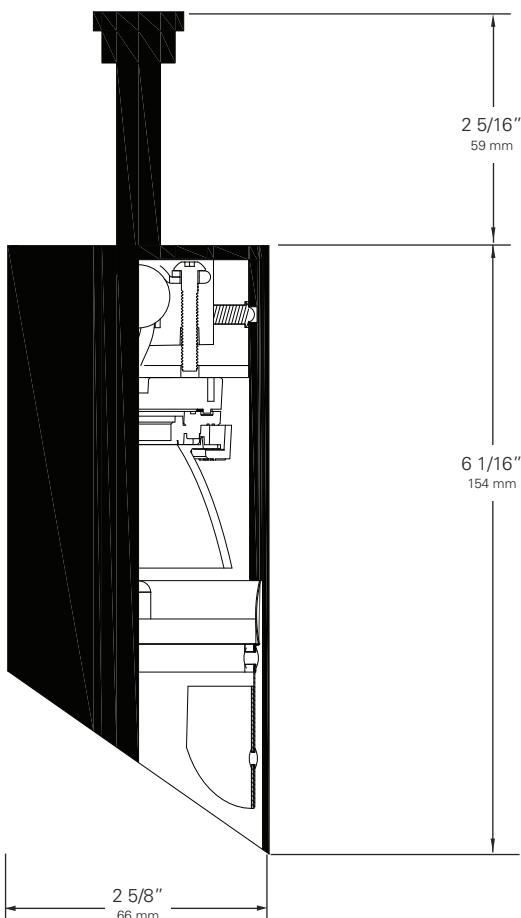**LX2031** • 120/277V • XICATO 19MM**XTM 19MM ORDERING INFORMATION****Base Fixture Model**
☐ LX2031-T19 (XTM 19mm)
**LED Rating (Lumens/CRI/Wattage)**
☐ 10-98 = 1050/98/14      ☐ 15-83 = 1500/83/16
**Color Temperature**
☐ 27= 2700K      ☐ 30= 3000K  
☐ 35= 3500K      ☐ 40= 4000K
**Fitting/Controls (Dimming)**
☐ 0E-TE = Track Fitting & Trailing Edge (10%)  
☐ PT5-ED = Track Fitting & Integral Dimmer (0.1%)  
☐ 0EEF-TE = Security/Worklight Track Fitting  
 & Trailing Edge (10%)  
☐ 5A-TE = Canopy Fitting & Trailing Edge (10%)  
☐ 5B-ED = Canopy Fitting & Integral Dimmer (0.1%)  
☐ 5B-10 = Canopy Fitting & 0-10V (0.1%)
**Voltage**
☐ 120 = 120V      ☐ 230 = 220-240V      ☐ 277 = 277V
**Finish**
☐ B = Black      ☐ W = White      ☐ S = Silver
**Example Part Number:**

**LX2031-T19**    **10-98**    **30 - 0E-TE**    **120**    **W**

FIXTURE MODEL    LED RATING    COLOR TEMP    FITTING/ VOLTAGE DIMMING    FINISH

**Other Options (Consult Factory):**

- Custom Stems, specify length (4" - 48")
- Custom Finish, RAL palette

**Color Temperature & Center Point Tolerance**

Color Temp	Center Point	Tolerance
2700K	2700K	+/- 40K
3000K	2950K	+/- 50K
3500K	3420K	+/- 60K
4000K	4000K	+/- 70K

**Chromaticity Specifications**

LED	R <sub>a</sub> -CRI	R <sub>f</sub> -Fidelity	R <sub>g</sub> -Gamut Area
T19-TS9 - 83	83	78	101
T19-TS9 - 98	98	96	103



# LX2031 • MOUNTING OPTIONS

## FITTING


## SIDE VIEW

## STEM LENGTH VIEW


**0E Track Fitting/  
0EEF Security/Worklight  
Fitting**

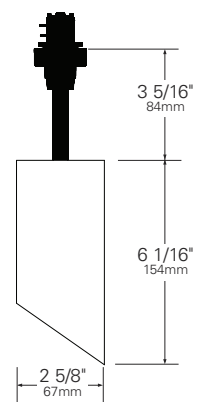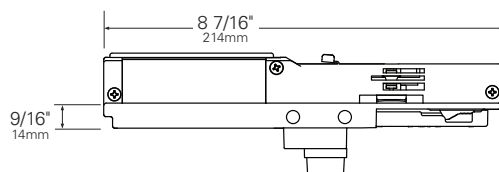



**PT5-ED Track Fitting  
with Integral Dimmer**

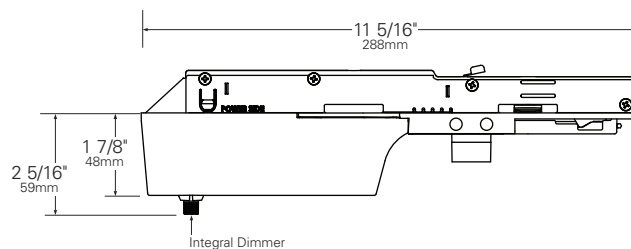

**5A Canopy Fitting  
with TE Dimming**

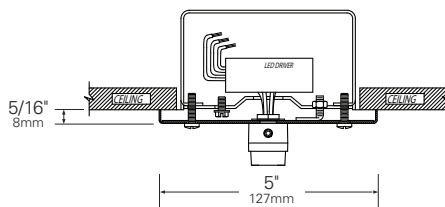

**5B Canopy Fitting  
with Integral Dimmer  
and 0-10V Dimming**

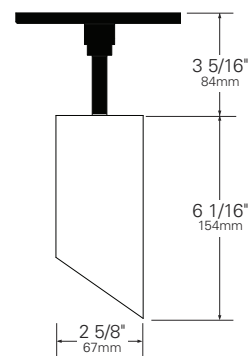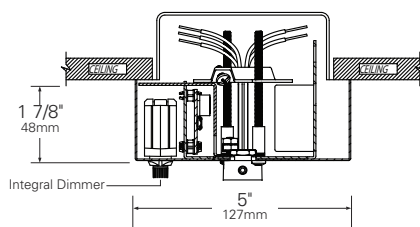

# LX2031 • PERFORMANCE

The performance characteristics of the LumeLEX family of products can be customized based on the LED module and the optic (reflector) selected.

Each available LED module is defined by four characteristics – the color rendering index (CRI), the correlated color temperature (CCT), the power that it uses (watts), and its “available lumens.” Note that available lumens is a theoretical value that represents the light output of the module on its own – no fixture or optic attached.

In the LSI part number, the LED module is specified with range of numbers that immediately follow the product series number. For example, in the part number LX2031-T1915-8327-0E-TE120B, the “**T1915-83**” represents an LED module with an output of 1500 lumens, a CRI of 83, a power usage of 16 watts and a color temperature of 2700K.

Additional parameters, such as Delivered Lumens, and Efficiency (Lumens per Watt) are all shown in a table that is organized by LED module and optic combination.

Delivered Lumens	
LED Module	Optic (Reflector)
Lumens/CRI/Wattage	S4 + Gel
1050/98/14	513
1500/83/16	733

Efficiency = Lumens Per Watt	
LED Module	Optic (Reflector)
Lumens/CRI/Wattage	S4 + Gel
1050/98/14	37
1500/83/16	46

*Absolute range of values are +/- 10% of typical value, and are for all color temperatures*

LED Rating		
Lumens/CRI/Wattage SKU Code	1050/98/14 10-98	1500/83/16 15-83
Nominal Fixture Power (+/- 20%), Watts	14	16
Maximum Inrush Current Amps	10	10
Minimum Power Factor	0.90	0.90

*Inrush current is instantaneous current drawn by the LED only when fixture is initially powered on or instantaneously changed from full dim to full bright. For more details see Dimming Application Sheet, IS-0119.*

LX2031 • PHOTOMETRIC DATA

For all charts on this page:  
A. 3' from wall, 3' on center  
B. 4' from wall, 4' on center

LED Rating 10-98

Source Lumens1050

CRI98

Wattage13

LED Rating 15-83

Source Lumens1500

CRI83


Wattage14

LX2031 PHOTOMETRIC DATA

Unit aimed straight down												Unit aimed 5'3" up wall											
A												A											
B												B											
1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'
3	3	3	3	2	2	2	2	2	6	6	6	6	4	4	4	4	4	6	6	6	6	4	4
6	6	6	6	3	3	3	3	3	8	8	8	8	6	6	6	6	6	8	8	8	8	6	6
9	9	9	9	4	4	4	4	4	12	14	14	14	8	8	8	8	8	12	14	14	14	8	8
12	12	12	12	5	5	5	5	5	18	18	18	18	10	10	10	10	10	18	18	18	18	10	10
13	13	13	13	6	7	7	7	6	18	20	20	18	12	12	12	12	12	16	18	18	16	12	12
13	13	13	13	7	7	7	7	7	16	18	18	16	12	12	12	12	12	14	14	14	12	12	12
12	11	11	12	7	7	7	7	7	10	12	12	10	10	10	10	10	10	8	10	10	8	8	8
10	10	10	10	7	7	7	7	7	8	10	10	8	8	10	10	10	8	6	8	8	6	6	6
9	9	9	9	6	6	6	6	6	6	8	10	8	8	10	10	10	8	6	8	8	6	6	6
8	8	8	8	6	6	6	6	6	6	6	8	6	6	8	8	8	6	6	6	6	6	6	6
7	7	7	7	5	5	5	5	5	6	6	6	6	6	6	6	6	6	4	5	5	4	4	4
6	6	6	6	4	5	5	4	4	4	4	4	4	4	6	6	6	4	4	4	4	4	4	4


Photometric Data based on LED Rating: 15-83 (1500 Lumens/83CRI/14watts)

LX2031 • ACCESSORIES

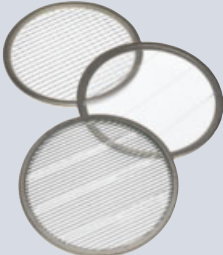

SPREAD LENSES AND BEAM SOFTENER


No.	Description	% of Light Transmission
990	Spread Lens/Clear	83 (5°X 50°)
992	Spread Lens/Clear	85 (5°X 30°)
995	Spread Lens/Clear	83 (50°X 50°)
996	Spread Lens/Clear	86 (45°X 50°)
998	Beam Softener/Clear	80 (45°X 45°)



'LIGHT BLOCKING SCREENS AAA


Aluminum mesh screens used alone or in combinations will block from approximately 20% to 90% of the transmitted light without changing color temperature of the light.

No.	% of Light Blocked
AAA801S	20
AAA802S	30
AAA803S	40




LOUVER HEX AAAB

1/8" thick Hexcell black metal louver used for thin profile. Black finish.



BACKER RING AAAB

Aluminum ring to hold thin film gels when no other size AAA accessories are being used. Black finish.



LX2030FR Spotlight Cylinder Housing

which includes front, internal accessory clips, and cross baffle for 45° cutoff. Specify color.

1. Figures vary based upon LED module/optic being used and relationship of screen(s) to LED module/optic and to each other.

# LX2031 • GELS

As the foremost innovator in accent lighting, LSI offers a complete range of pre-cut Gels to modify the spread and color of light for the LumeLEX LED Series.



## LumeLEX® BEAM SOFTENER GEL (FOR LumeLEX® 2031 ONLY)

Size: AAA (60 mm diameter)	Beam Softener Gel
GEL-R101-AAA	Beam Softener

## LumeLEX® COLOR GELS

Size: AAA (60 mm diameter)	Gel Color	% of Light Transmission	Size: AAA (60 mm diameter)	Gel Color	% of Light Transmission
GEL-R2-AAA	Bastard Amber	78	GEL-R312-AAA	Canary	85
GEL-R7-AAA	Pale Yellow	96	GEL-R331-AAA	Shell Pink	68
GEL-R12-AAA	Straw	88	GEL-R383-AAA	Sapphire Blue	4
GEL-R13-AAA	Straw Tint	78	GEL-R397-AAA	Pale Grey	70
GEL-R14-AAA	Medium Straw	68	GEL-R2001-AAA	Storaro Red	12
GEL-R21-AAA	Golden Amber	43	GEL-R2004-AAA	Storaro Green	15
GEL-R25-AAA	Orange Red	14	GEL-R2009-AAA	Storaro Violet	3
GEL-R26-AAA	Light Red	12	GEL-R3202-AAA	Full Blue	36
GEL-R27-AAA	Medium Red	4	GEL-R3204-AAA	Half Blue	52
GEL-R57-AAA	Lavender	24	GEL-R3206-AAA	Third Blue	64
GEL-R62-AAA	Booster Blue	54	GEL-R3216-AAA	Eighth Blue (Boosts 3200K to 3300K)	81
GEL-R71-AAA	Sea Blue	30	GEL-R3318-AAA	Tough 1/8 Minusgreen	89
GEL-R72-AAA	Azure Blue	44	GEL-R3410-AAA	Roscosun (1/8 CTO) (Reduces 5500K to 4900K)	92
GEL-R91-AAA	Primary Green	7	GEL-R3441-AAA	Full Straw (CTS)	50
GEL-R97-AAA	Light Grey	50	GEL-R3443-AAA	Quarter Straw (CTS)	81
GEL-R98-AAA	Medium Grey	25	GEL-R4330-AAA	CalColor 30 Cyan	63
GEL-R101-AAA	Light Frost	N/A	GEL-R4415-AAA	CalColor 15 Green	67
GEL-R104-AAA	Tough Silk	N/A	GEL-R4490-AAA	CalColor 90 Green	25
GEL-R119-AAA	Lt. Hamburg Frost	N/A	GEL-R4860-AAA	CalColor 60 Pink	46
GEL-R121-AAA	Blue Diffusion	N/A	GEL-R4890-AAA	CalColor 90 Pink	38
GEL-R305-AAA	Rose Gold	75	GEL-R4930-AAA	CalColor 30 Lavender	47

\* Backer Ring AAAB required to hold gels when no other rimmed "AAA" accessories are used.

LSI ROSCO GEL CCT CONVERSION CHART FROM 3000K			
Type	ROSCO #	ROSCO Description	Resulting CCT
Amber Filters Lower CCT	3420	Double CTO	1531
	3407	Sun CTO	1999
	3401	Sun 85	2154
	3411	Sun 3/4 CTO	2154
	3408	Sun 1/2 CTO	2414
	3409	Sun 1/4 CTO	2664
	3410	Sun 1/8 CTO	2830
	3114	UV Filter	2930
Blue Filters Raise CCT	3220	Double Blue	N/A
	3202	Full Blue	4942
	3203	Three-Quarter Blue	4286
	3204	Half Blue	3769
	3206	Third Blue	3517
	3208	Quarter Blue	3297
	3216	Eighth Blue	3112

# COLOR MEDIA

## COLOR FILTERS

As the foremost innovator in accent lighting, LSI offers a complete range of permanent fade-free glass color filters, which are available in four stock diameters. All glass color filters are rimmed in a seamless aluminum ring and are slotted for heat expansion.



Size	Diameter	LSI Fixture Series
AAA	2 3/8"	LumeLEX® 2020/2030/2031/2038, SSLCX16, SSL260
AA	3"	LumeLEX® 2044, LumeLEX 2048
A	3 1/2"	LumeLEX® 2060, SSL230, SSLCX30, SSLGR30CL
C	4 3/4"	LumeLEX® 2084, LumeLEX® 2088, SSL238, SSLCX36, SSLCX38, SSLGR38CL

No.	Color	% of Light Transmission
902	Medium Pink	36
903	Deep Pink	37
904	Flesh Pink	73
906	Pale Lavender	14
907	Surprise Pink	19
908	Lilac	21
910	Warm Red	10
911	Strawberry	6
912	Ruby	4
913	Magenta	1
914	Light Amethyst	25
915	Medium Amethyst	16
916	Deep Amethyst	4
917	Olive	18
918	Light Green	68
920	Medium Green	25
921	Deep Green	7
922	Silver green	65
923	Yellow Green	49
924	Emerald Green	12
925	Light Turquoise	68
926	Medium Turquoise	40
927	Deep Turquoise	17
928	Light Blue	34
930	Medium Blue	3
932	Daylight	59
933	Gene Moore Blue	18
936	Grey	56
937	Light Blue Green	17
939	Light Amber	68
940	Medium Amber	48
941	Deep Amber	43
942	Straw	78
943	Gold	87
944	Canary Yellow	84
945	Lemon	81
946	Pumpkin	32
947	Tangerine	20
948	Orange	23
949	Pink Gold	54
950	Bronze	48
951	Brass	11
952	Autumn Tan	11
953	Leaf Brown	19
954	Butter Pecan	3
955	Toasted Almond	1

**Notes:**

1. Values given are approximate due to slight variations in glass color and thickness.




# COLOR MEDIA

## DICHROIC COLOR FILTERS

In addition to our complete line of glass color filters, LSI now offers dichroic glass color filters that achieve purer, more saturated, richer color by selective wavelength transmission. Since these filters reflect rather than absorb the unwanted color wavelengths, a higher intensity of colored light can be obtained with fewer or lower wattage fixtures. In addition, this selective transmission allows for very accurate color matching from filter to filter.

All standard LSI filter sizes are available in a wide palette of well chosen dichroic colors that can be used with all LSI fixtures that accept accessories.

LSI dichroic glass color filters have the added benefit of being rimmed for extra durability to allow for frequent usage without fear of breakage or edge chipping.

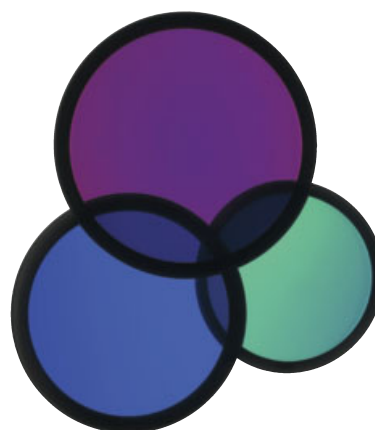

Size	Diameter	LSI Fixture Series	Technical Data	No.	Color	% of Light Transmission
AAA	2 3/8"	LumeLEX® 2020/2030/2031/2038, SSLCX16, SSL260	Dichroic color filters are created in a vacuum chamber by multi-layer vapor deposits of different minerals onto low expansion, chemically resistant Borosilicate glass.	2001	Light Pink	69
AA	3"	LumeLEX® 2044, LumeLEX 2048	Deposits are made in alternating layers of varying microscopic thickness which allow very narrow color wavelengths to be selectively transmitted and all other wavelengths to be reflected.	2002	Medium Pink	43
A	3 1/2"	LumeLEX® 2060, SSL230, SSLCX30, SSLGR30CL	LSI does not recommend using dichroic color filters with lamps or fixtures that have beam spreads greater than 40° because a secondary color aura is created by the wide angular transmitted wavelengths that are different than the desired color wavelength.	2003	Hot Pink	11
C	4 3/4"	LumeLEX® 2084, LumeLEX® 2088, SSL238, SSLCX36, SSLCX38, SSLGR38CL	Since there is mainly transmission and reflection of the color wavelengths by the dichroic filter and very little absorption, the dichroic filter can be used with many high temperature lights that normally would not accept color filters.	2004	Pale Pink	55
				2010	Deep Magenta	29
				2011	Lavender	24
				2012	Vivid Magenta	31
				2013	Lavender Accent	48
				2014	Lilac	37
				2015	Purple Fusion	12
				2020	Sky Blue	39
				2021	Sea Blue	39
				2022	Cyan	33
				2023	Light Blue Green	30
				2024	Primary Blue	24
				2025	Medium Red Blue	15
				2026	Deep Purple	16
				2027	Peacock Blue	53
				2028	Mediterranean Blue	20
				2029	Boost Blue	51
				2040	Light Yellow Green	64
				2041	Fern Green	47
				2042	Turquoise	35
				2043	Primary Green	31
				2044	Industrial Green	64
				2050	Yellow	80
				2051	Amber	71
				2052	Amber Blush	38
				2053	Bastard Amber	71
				2054	Goldenrod	63
				2055	Bright Straw	56
				2060	Medium Orange	51
				2061	Orange	44
				2070	Flame Red	27
				2071	Primary Red	25