

LX2048 • 120/277V • LED • DIM TO WARM



Elegant fixed downlight designed specifically for the most demanding architecture applications.


- Designed for a Dim to Warm module up to 22 Watts
- Natural dimming that approximates the black body curve
- System efficiency up to 59 lumens/watt
- 36,000 hour life to 70% lumen output, L70 at 95°F max ambient
- Halogen mimicking color from 2800°K to 2000°K
- Color Rendering Index (CRI) of 92 min. at all dimming settings
- Color Fidelity (R_f) 92
- Gamut Area Index (R_g) 102
- Lumen output: 1800 Lumens
- Proprietary mixing optics for smooth even light
- Tested to LM79 and LM80 Protocols, TM-30 available
- Hidden integral electronic driver compatible with various dimmers down to 5%
- Field interchangeable optics (15°- 50°) modify the beam spread distribution
- Integral black polycarbonate accessory cartridge accepts up to two size-AA LSI filters and accessories
- Finishes: LSI Black, White, and Silver
- Fixture weight: 3.5 lbs
- All modules are field replaceable
- Fixed center stem
- Maximum stem length is 48"

FIXTURE PART NUMBERS

Please review the **ORDERING INFORMATION** section on the next page as well as the **MOUNTING OPTIONS** on page 3 to create a part number for each fixture that specifies the following:


- LED Module
- LED Rating
- Color Temperature
- Optic (mm/beam spread)
- Fitting/Controls (Dimming)
- Voltage
- Finish

PART NUMBER

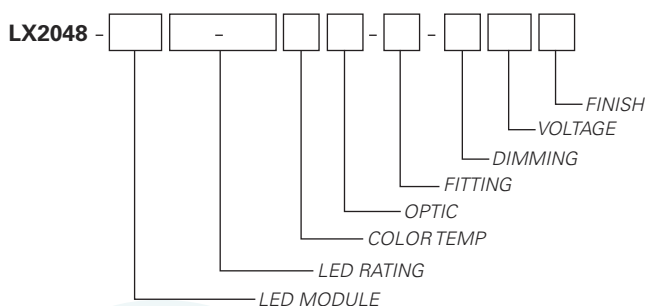

Example Part Number: **LX2048-D1518-92DWW2-00-TE120W** is a fixture with a Dim to Warm LED module, 1800 Lumen/92 CRI/22 Watt LED rating, 2800° - 2000°K Color Temperature, 72mm 20° Color Mixing Optic, 00 Track fitting with Trailing Edge group dimming capability, 120V and a White finish.

LX2048 • 120/277V • LED • DIM TO WARM

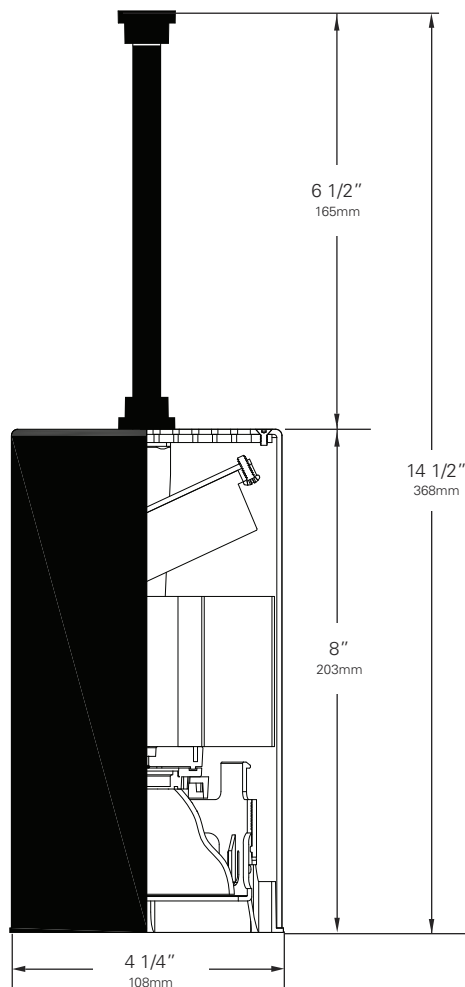

Chromaticity Specifications

LED	R _a -CRI	R _f -Fidelity	R _g -Gamut Area
D15	92	92	102

DIM TO WARM ORDERING INFORMATION

Base Fixture Model

☐ LX2048-D15 (Dim to Warm)

LED Rating (Lumens/CRI/Wattage)

☐ 18-92 = 1800/92/22

Color Temperature

☐ DW = 2800K to 2000K

Optic

☐ WR* = 72mm/ 15° Color Mixing & Field Reducer

*Not for use with 2000 Lumens and up

☐ W2 = 72mm/ 20° Color Mixing

☐ W3 = 72mm/ 30° Color Mixing

☐ W4 = 72mm/ 40° Color Mixing

☐ W5 = 72mm/ 50° Color Mixing

Fitting/Controls (Dimming)

☐ 00-TE = Track Fitting & Trailing Edge (5%)

☐ 00EF-TE = Security/Worklight Track Fitting
& Trailing Edge (5%)

☐ 5A-TE = Canopy Fitting & Trailing Edge (5%)

☐ 5A-10 = Canopy Fitting & 0-10V (10%)

Voltage

☐ 120 = 120V ☐ 230 = 220-240V ☐ 277 = 277V

Finish

☐ B = Black ☐ W = White ☐ S = Silver





Example Part Number:

LX2048-D15 **18-92** **DW** **W2 - 00-TE** **120** **W**
FIXTURE MODEL LED RATING COLOR TEMP OPTIC FITTING/DIMMING VOLTAGE FINISH

Other Options (Consult Factory):

- Custom Stems, specify length (4" - 48")
- Custom Finish, RAL palette

LX2048 • MOUNTING OPTIONS

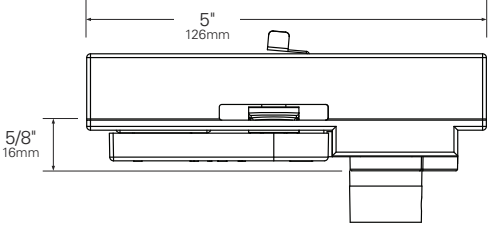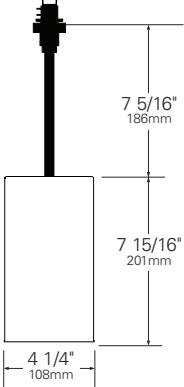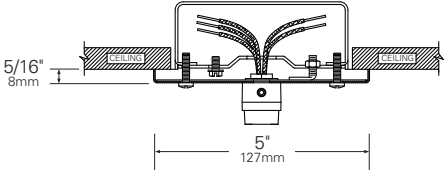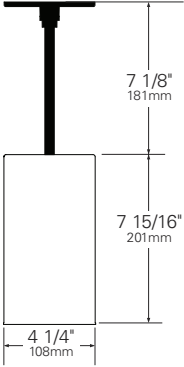FITTING	SIDE VIEW	STEM LENGTH VIEW
00 Track Fitting/ 00EF Security/Worklight Fitting		
5A Canopy Fitting with TE Dimming		

LX2048 • PERFORMANCE

The performance characteristics of the Dim to Warm LumeLEX family of products can be customized based on the optic (reflector) selected.

The behavior of the Dim to Warm modules links the color of the light to the dimmed output of the fixture just like a halogen or incandescent source. Therefore the four characteristics defining the color — the color rendering index (CRI), the correlated color temperature (CCT) range, the power that it uses (watts), and its “available lumens” — are linked to the dim setting. Note that available lumens is a theoretical value that represents the light output of the module on its own — no fixture or optic attached. Also note that the CRI of this fixture is a minimum of 92 at any dimming setting.

In the LSI part number, the LED module is specified with a letter and a number that immediately follow the product series number. For example, in the part number LX2048-D1518-92DWW2-00-TE220B, the “D1518-92DW” represents a Dim to Warm LED module with an output of 1800 lumens, a CRI of 92, a power usage of 22 watts and a color temperature range of 2800K – 2000K that is tied to the dimming setting.

The available optics (reflectors) are characterized by size, beam angle, and in some cases the characteristics of the field angle (narrow or wide). The optic is specified by the two characters that follow the LED designation in the part number. For example, the “W2” in LX2048-D1518-92DWW2-00-TE120B is a 70mm diameter optic that has a 20-Degree beam.

Additional parameters, such as Center Beam Candle Power (CBCP), Delivered Lumens, and Efficiency (Lumens per Watt) are all shown in a table that is organized by LED module and optic combination.

CBCP = Center Beam Candle Power

LED Module	Optic (Reflector)				
Lumens/CRI/Wattage	W2	WR	W3	W4	W5
1800/92/22	7350	5512	4201	2991	2292

Delivered Lumens

LED Module	Optic (Reflector)				
Lumens/CRI/Wattage	W2	WR	W3	W4	W5
1800/92/22	1265	506	1212	1226	1305

Efficiency = Lumens Per Watt


LED Module	Optic (Reflector)				
Lumens/CRI/Wattage	W2	WR	W3	W4	W5
1800/92/22	57	23	55	56	59

Absolute range of values are +/- 10% of typical value, and are for all color temperatures

LED Module Lumens/CRI/Wattage SKU Code	1800/92/22 18-92
Nominal Fixture Power (+/- 20%), Watts	22
Maximum Inrush Current Amps	10
Minimum Power Factor	0.92

Inrush current is instantaneous current drawn by the LED only when fixture is initially powered on or instantaneously changed from full dim to full bright. For more details see Dimming Application Sheet, IS-0119.


LX2048 • OPTICS



LX-WRD-REF-CLR (WR) (72mm/15°)


Field reducer. Proprietary field reducing baffle (black) with aluminized reflector. Tool-less, twist and lock installation.

*Not for use with 2000 Lumens and up




LX-W20-REF-CLR (W2) (72mm/20°)

Faceted reflectively coated metal optic. Tool-less twist and lock installation. Aluminized finish.




LX-W30-REF-CLR (W3) (72mm/30°)

Faceted reflectively coated metal optic. Tool-less twist and lock installation. Aluminized finish.



LX-W40-REF-CLR (W4) (72mm/40°)

Faceted reflectively coated metal optic. Tool-less twist and lock installation. Aluminized finish.

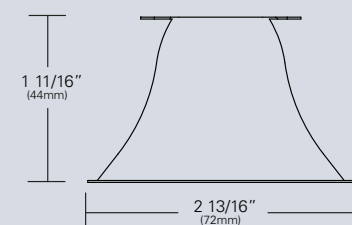

LX-W50-REF-CLR (W5) (72mm/50°)

Faceted reflectively coated metal optic. Tool-less twist and lock installation. Aluminized finish.

LX2048

• PHOTOMETRIC DATA

LED RATING: 18-92

WR-72mm DIA Optic	
Beam Spread (minimum)	15°
(FR: Field Reducer)	5572
Center Beam Candlepower	92
CRI	
W2-72mm DIA Optic	
Beam Spread (minimum)	20°
Center Beam Candlepower	7350
CRI	92
W3-72mm DIA Optic	
Beam Spread (minimum)	30°
Center Beam Candlepower	4201
CRI	92
W4-72mm DIA Optic	
Beam Spread (minimum)	40°
Center Beam Candlepower	2991
CRI	92
W5-72mm DIA Optic	
Beam Spread (minimum)	50°
Center Beam Candlepower	2292
CRI	92

LED RATING: 25-92

All Max. Footcandles at 0° Beam Axis	LED RATING: 25-92					WR (15°) FR		All Distances in Feet	
	W5 (50°)	W4 (40°)	W3 (30°)	W2 (20°)				6 4 2 0 2 4 6	
	2292	2991	4201	7350	5572				1
	573	748	1050	1838	1393				2
	255	332	467	817	619				3
	143	187	263	459	348				4
	92	120	168	294	223				5
	64	83	117	204	155				6
	47	61	86	150	114				7
	36	47	66	115	87				8
	28	37	52	91	69				9
	23	30	42	74	56				10
	19	25	35	61	46				11
	16	21	29	51	39				12
	14	18	25	43	33				13
	12	15	21	38	28				14
	10	13	19	33	25				15
	9	12	16	29	22				16
	8	10	15	25	19				17
	7	9	13	23	17				18
	6	8	12	20	15				19
	6	7	11	18	14				20
	5	7	10	17	13				21
	5	6	9	15	12				22
	4	6	8	14	11				23
	4	5	7	13	10				24
	4	5	7	12	9				25

Photometric Data based on LED Rating: 18-92 (1800 Lumens/92CRI/22watts)

LX2048 • ACCESSORIES

SPREAD LENSES AND BEAM SOFTENER

No.	Description	% of Light Transmission
AA990	Spread Lens/Clear	83 (5°X 50°)
AA992	Spread Lens/Clear	85 (5°X 30°)
AA995	Spread Lens/Clear	83 (50°X 50°)
AA996	Spread Lens/Clear	86 (45°X 50°)
AA998	Beam Softener/Clear	80 (45°X 45°)

BACKER RING AAB

Aluminum ring to hold gel when no other size AA accessories are being used. Black finish.

1' LIGHT BLOCKING SCREENS AA

Stainless steel mesh screens used alone or in combinations will block from approximately 20% to 90% of the transmitted light without changing color temperature of the light.

No.	% of Light Blocked
AA801S	20
AA802S	30
AA803S	40

LOUVER HEX AAB

1/8" thick Hexcell black metal louver used for thin profile. Black finish.

HOOD-EXT-LX44-NXB-X

Externally mounted cylindrical metal hood controls spill light and glare. Does not include cross baffle.

Specify finish as follows:
HOOD-EXT-LX44-NXB-B (BLACK)
HOOD-EXT-LX44-NXB-W (WHITE)
HOOD-EXT-LX44-NXB-S (SILVER)

HOOD-EXT-LX44-WXB-X

Externally mounted cylindrical metal hood controls spill light and glare. Includes cross baffle.

Specify finish as follows:
HOOD-EXT-LX44-WXB-B (BLACK)
HOOD-EXT-LX44-WXB-W (WHITE)
HOOD-EXT-LX44-WXB-S (SILVER)

HOOD AAX

Internally mounted cylindrical metal hood controls spill light and glare.

Specify finish as follows:
HOOD AAB (BLACK)
HOOD AAW (WHITE)
HOOD AAS (SILVER)

1. Figures vary based upon LED Module/Optic being used and relationship of screen(s) to LED Module/Optic and to each other.

LX2048 • GELS

As the foremost innovator in accent lighting, LSI offers a complete range of pre-cut Gels to modify the spread and color of light for the LumeLEX LED Series.



LumeLEX® SPREAD GELS

Size: AA (76 mm diameter)	Spread Gel
GEL-L1-AA	1° Spread Gel
GEL-L5-AA	5° Spread Gel
GEL-L10-AA	10° Spread Gel
GEL-L20-AA	20° Spread Gel
GEL-L30-AA	30° Spread Gel
GEL-L40-AA	40° Spread Gel
GEL-L60-AA	60° Spread Gel
GEL-L80-AA	80° Spread Gel
GEL-L30X5-AA	30° by 5° Spread Gel
GEL-L40X1-AA	40° by 1° Spread Gel
GEL-L60X1-AA	60° by 1° Spread Gel
GEL-L60X10-AA	60° by 10° Spread Gel
GEL-L75X45-AA	75° by 45° Spread Gel
GEL-L90X60-AA	90° by 60° Spread Gel
GEL-R101-AA	Beam Softener

* Backer Ring AAB required to hold gels when no other rimmed "AA" accessories are used.