

# LX2060 • 120/277V • TUNABLE WHITE 18MM • CONTROLTrack COMPATIBLE



## Elegant fixed downlight designed specifically for the most demanding architecture applications.


- Designed for a Tunable White LED module up to 30 Watts
- Extremely tight color consistency: 3 MacAdam Ellipses
- System efficiency up to 65 lumens/watt
- 55,000 hour life to 70% lumen output, L70 at 95°F max ambient
- Tunable White from 2700K to 6500K
- Color Rendering Index (CRI) of 92 min.
- Color Fidelity (R<sub>f</sub>) 96 (high)
- Gamut Area Index (R<sub>g</sub>) 99
- Tested to LM79 and LM80 Protocols, TM-30 available
- 2 Zone 0-10V Controls allow for dimming on Zone 1 and CCT control on Zone 2
- DMX compatible with dimming below 1%
- Field interchangeable optics (20- 50°) modify the beam spread distribution
- Accessory holder accepts up to two size-A LSI filters and accessories
- Finishes: LSI Black, White, and Silver
- Fixture weight: 6 lbs
- All modules are field replaceable

## FIXTURE PART NUMBERS

Please review the **ORDERING INFORMATION** section on the next page as well as the **MOUNTING OPTIONS** on page 3 to create a part number for each fixture that specifies the following:


- LED Module
- LED Rating
- Color Temperature
- Optic (mm/beam spread)
- Fitting (Mounting Option)
- Dimming
- Voltage
- Finish

### PART NUMBER

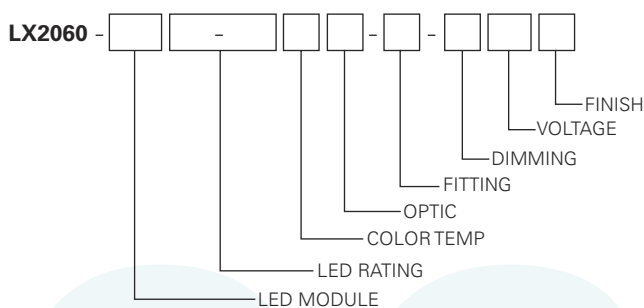

Example Part Number: **LX2060-B1824-92TWW2-CT3-DX120W** is a fixture with a Tunable White LED module, 2400 Lumen/92 CRI/30 Watt LED rating, Tunable White 2700K- 6500K Color Temperature, 72mm 20° Optic, CT3 CONTROLTrack fitting with DMX Address knobs and DMX compatible control gear, 120V and a White finish.

# LX2060 • 120/277V • TUNABLE WHITE 18MM • CONTROLTrack COMPATIBLE

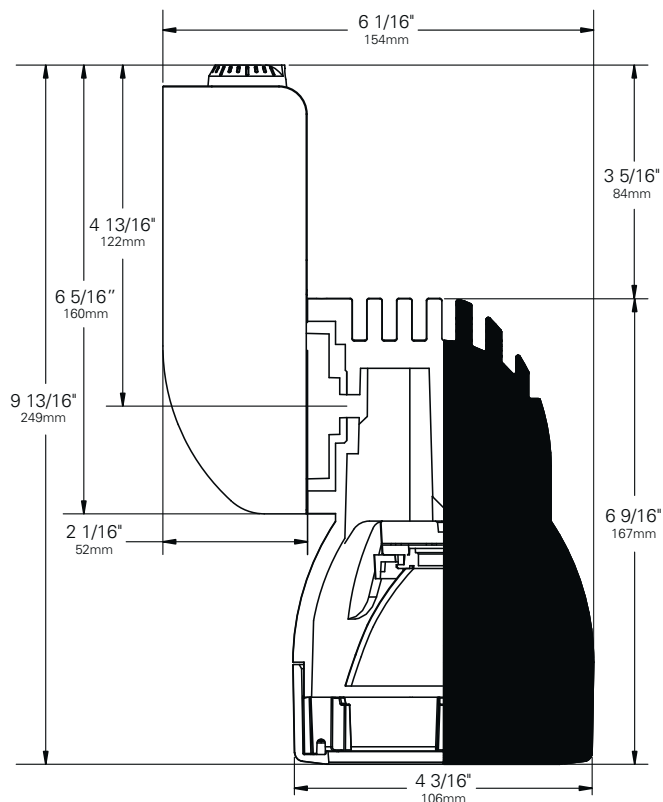

## TUNABLE WHITE 18MM ORDERING INFORMATION

### Base Fixture Model

- LX2060-B18 (Tunable White 18mm)

### LED Rating (Lumens/CRI/Wattage)

- 24-92 = 2400/92/30

### Color Temperature

- TW = 2700K to 6500K

### Optic

- W2 = 72mm/ 20° color mixing
- W3 = 72mm/ 30° color mixing
- W4 = 72mm/ 40° color mixing
- W5 = 72mm/ 50° color mixing

### Fitting/Controls (Dimming)

- CT2-10 = CONTROLTrack Fitting & 0-10V (<1%)
- CT3-DX = CONTROLTrack Fitting & DMX (<1%)

### Voltage

- 120 = 120V
- 230 = 220-240V
- 277 = 277V

### Finish

- B = Black
- W = White
- S = Silver

### Example Part Number:

**LX2060-B18**   **24-92**   **TW**   **W2** - **CT3-DX**   **120**   **W**

FIXTURE MODEL   LED RATING   COLOR TEMP   OPTIC   FITTING/ DIMMING   VOLTAGE   FINISH



### Other Options (Consult Factory):

- Custom Finish, RAL palette


# LX2060 • MOUNTING OPTIONS

FITTING	SIDE VIEW	STEM LENGTH VIEW
---------	-----------	------------------

**CT2 CONTROLTrack Fitting**

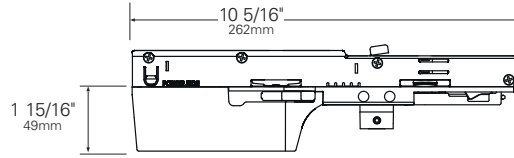

**CT3 CONTROLTrack Fitting**

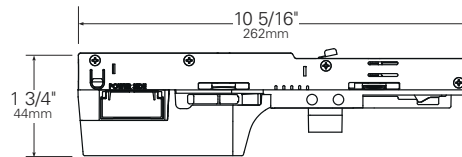

# LX2060 • PERFORMANCE

The performance characteristics of the LumeLEX family of products can be customized based on the LED module and the optic (reflector) selected.

Each available LED module is defined by four characteristics – the color rendering index (CRI), the correlated color temperature (CCT), the power that it uses (watts), and its “available lumens.” Note that available lumens is a theoretical value that represents the light output of the module on its own – no fixture or optic attached.

In the LSI part number, the LED module is specified with a letter and a number that immediately follow the product series number. For example, in the part number LX2060-B1824-92TWW2-CT3-DX120B, the “**B1824-92TW**” represents an LED module with an output of 2400 lumens, a CRI of 92, a power usage of 30 watts and a color temperature of 2700K-6500K.

The available optics (reflectors) are characterized by size, beam angle, and in some cases the characteristics of the field angle (narrow or wide). The optic is specified by the two characters that follow the LED designation in the part number. For example, the “**W2**” in LX2060-B1824-92TWW2-CT3-DX120B is a 72mm diameter optic that has a 20-Degree beam.

Additional parameters, such as Center Beam Candle Power (CBCP), Delivered Lumens, and Efficiency (Lumens per Watt) are all shown in a table that is organized by LED module and optic combination.

## CBCP = Center Beam Candle Power

LED Module	Optic (Reflector)			
Lumens/CRI/Wattage	W2	W3	W4	W5
<b>2400/92/30</b>	8,023	4,817	3,894	2,794

## Delivered Lumens

LED Module	Optic (Reflector)			
Lumens/CRI/Wattage	W2	W3	W4	W5
<b>2400/92/30</b>	1,947	1,850	1,912	1,941





## Efficiency = Lumens Per Watt

LED Module	Optic (Reflector)			
Lumens/CRI/Wattage	W2	W3	W4	W5
<b>2400/92/30</b>	65	62	64	65

LED Rating Lumens/CRI/Wattage SKU Code	2400/92/30 24-92
Nominal Fixture Power (+/- 20%), Watts	30
Maximum Inrush Current Amps	10
Minimum Power Factor	0.92

Inrush current is instantaneous current drawn by the LED only when fixture is initially powered on or instantaneously changed from full dim to full bright. For more details see Dimming Application Sheet, IS-0119.

# LX2060 • OPTICS

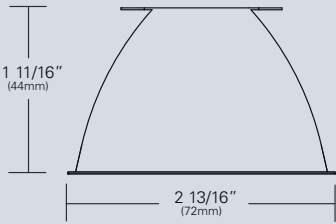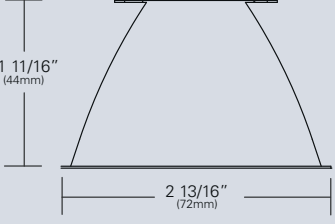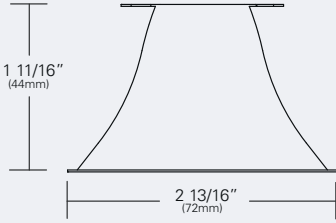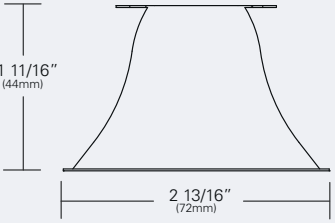 <p><b>LX-W20-REF-CLR (W2)</b> <b>(72mm/20°)</b> Faceted reflectively coated metal optic. Tool-less twist and lock installation. Aluminized finish.</p>	 <p><b>LX-W30-REF-CLR (W3)</b> <b>(72mm/30°)</b> Faceted reflectively coated metal optic. Tool-less twist and lock installation. Aluminized finish.</p>
 <p><b>LX-W40-REF-CLR (W4)</b> <b>(72mm/40°)</b> Faceted reflectively coated metal optic. Tool-less twist and lock installation. Aluminized finish.</p>	 <p><b>LX-W50-REF-CLR (W5)</b> <b>(72mm/50°)</b> Faceted reflectively coated metal optic. Tool-less twist and lock installation. Aluminized finish.</p>

# LX2060 • PHOTOMETRIC DATA

**LED RATING: 24-92**

**W2-72mm DIA Optic**

Beam Spread (minimum) **20°**  
 Center Beam Candlepower **8023**  
 CRI **92**

**W3-72mm DIA Optic**

Beam Spread (minimum) **30°**  
 Center Beam Candlepower **4817**  
 CRI **92**

**W4-72mm DIA Optic**

Beam Spread (minimum) **40°**  
 Center Beam Candlepower **3894**  
 CRI **92**

**W5-72mm DIA Optic**


Beam Spread (minimum) **50°**  
 Center Beam Candlepower **2794**  
 CRI **92**

**LED RATING: 24-92**

All Max. Footcandles at 0° Beam Axis

	W5 (50°)	W4 (40°)	W3 (30°)	W2 (20°)
1	2794	3894	4817	8023
2	699	974	1204	2006
3	310	433	535	891
4	175	243	301	501
5	112	156	193	321
6	78	108	134	223
7	57	79	98	164
8	44	61	75	125
9	34	48	59	99
10	28	39	48	80
11	23	32	40	66
12	19	27	33	56
13	17	23	29	47
14	14	20	25	41
15	12	17	21	36
16	11	15	19	31
17	10	13	17	28
18	9	12	15	25
19	8	11	13	22
20	7	10	12	20
21	6	9	11	18
22	6	8	10	17
23	5	7	9	15
24	5	7	8	14
25	4	6	8	13

**All Distances in Feet**

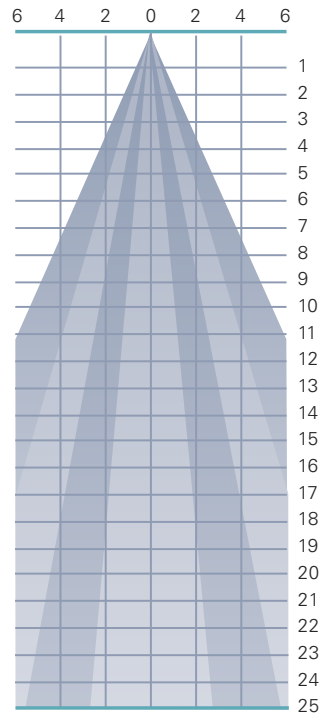

Photometric Data based on LED Rating: 24-92 (2400 Lumens/92CRI/30watts)

# LX2060 • ACCESSORIES



### HOOD-INT-LX60-X

2" deep hood.

Specify finish as follows:

HOOD-INT-LX60-B (BLACK)

HOOD-INT-LX60-W (WHITE)

HOOD-INT-LX60-S (SILVER)



### BACKER RING AB

Aluminum ring to hold gel when no other size A accessories are being used. Black finish.



### HOOD-ANG-LX60-X


2" deep angled hood.

Specify finish as follows:

HOOD-ANG-LX60-B (BLACK)

HOOD-ANG-LX60-W (WHITE)

HOOD-ANG-LX60-S (SILVER)



### <sup>1</sup>LIGHT BLOCKING SCREENS A

Stainless steel mesh screens used alone or in combinations will block from approximately 20% to 90% of the transmitted light without changing color temperature of the light.

No.	% of Light Blocked
A801S	20
A802S	30
A803S	40



### LOUVER HEX AB

1/8" thick Hexcell black metal louver used for thin profile. Black finish.

1. Figures vary based upon LED Module/Optic being used and relationship of screen(s) to LED Module/Optic and to each other.

# LX2060 • GELS

As the foremost innovator in accent lighting, LSI offers a complete range of pre-cut Gels to modify the spread and color of light for the LumeLEX LED Series.



## LumeLEX® SPREAD GELS

Size: A (89 mm diameter)	Spread Gel
GEL-L1-A	1° Spread Gel
GEL-L5-A	5° Spread Gel
GEL-L10-A	10° Spread Gel
GEL-L20-A	20° Spread Gel
GEL-L30-A	30° Spread Gel
GEL-L40-A	40° Spread Gel
GEL-L60-A	60° Spread Gel
GEL-L80-A	80° Spread Gel
GEL-L30X5-A	30° by 5° Spread Gel
GEL-L40X1-A	40° by 1° Spread Gel
GEL-L60X1-A	60° by 1° Spread Gel
GEL-L60X10-A	60° by 10° Spread Gel
GEL-L75X45-A	75° by 45° Spread Gel
GEL-L80X50-A	80° by 50° Spread Gel
GEL-R101-A	Beam Softener (Light Frost)

## LumeLEX® COLOR GELS

Size: A (89 mm diameter)	Gel Color	% of Light Transmission	Size: A (89 mm diameter)	Gel Color	% of Light Transmission
GEL-R2-A	Bastard Amber	78	GEL-R312-A	Canary	85
GEL-R7-A	Pale Yellow	96	GEL-R331-A	Shell Pink	68
GEL-R12-A	Straw	88	GEL-R383-A	Sapphire Blue	4
GEL-R13-A	Straw Tint	78	GEL-R397-A	Pale Grey	70
GEL-R14-A	Medium Straw	68	GEL-R2001-A	Storaro Red	12
GEL-R21-A	Golden Amber	43	GEL-R2004-A	Storaro Green	15
GEL-R25-A	Orange Red	14	GEL-R2009-A	Storaro Violet	3
GEL-R26-A	Light Red	12	GEL-R3202-A	Full Blue CTB	36
GEL-R27-A	Medium Red	4	GEL-R3204-A	Half Blue CTB	52
GEL-R57-A	Lavender	24	GEL-R3206-A	Third Blue CTB	64
GEL-R62-A	Booster Blue	54	GEL-R3216-A	Eighth Blue CTB (Boosts 3200K to 3300K)	81
GEL-R71-A	Sea Blue	30	GEL-R3318-A	Tough 1/8 Minusgreen	89
GEL-R72-A	Azure Blue	44	GEL-R3410-A	Roscosun (1/8 CTO) (Reduces 5500K to 4900K)	92
GEL-R91-A	Primary Green	7	GEL-R3441-A	Full Straw (CTS)	50
GEL-R97-A	Light Grey	50	GEL-R3443-A	Quarter Straw (1/4 CTS)	81
GEL-R98-A	Medium Grey	25	GEL-R4330-A	CalColor 30 Cyan	63
GEL-R101-A	Light Frost	N/A	GEL-R4415-A	CalColor 15 Green	67
GEL-R104-A	Tough Silk	N/A	GEL-R4490-A	CalColor 90 Green	25
GEL-R119-A	Lt. Hamburg Frost	N/A	GEL-R4860-A	CalColor 60 Pink	46
GEL-R121-A	Blue Diffusion	N/A	GEL-R4890-A	CalColor 90 Pink	38
GEL-R305-A	Rose Gold	75	GEL-R4930-A	CalColor 30 Lavender	47

\* Backer Ring AB required to hold gels when no other rimmed "A" accessories are used.

Type	ROSCO #	ROSCO Description	Resulting CCT
Amber Filters Lower CCT	3420	Roscosun Double CTO	1531
	3407	Roscosun CTO	1999
	3401	Roscosun 85	2154
	3411	Roscosun 3/4 CTO	2154
	3408	Roscosun 1/2 CTO	2414
	3409	Roscosun 1/4 CTO	2664
	3410	Roscosun 1/8 CTO	2830
3114	UV Filter	2930	
Blue Filters Raise CCT	3220	Double Blue CTB	N/A
	3202	Full Blue CTB	4942
	3203	Three-Quarter Blue CTB	4286
	3204	Half Blue CTB	3769
	3206	Third Blue CTB	3517
	3208	Quarter Blue CTB	3297
3216	Eighth Blue CTB	3112	



# COLOR MEDIA

## COLOR FILTERS

As the foremost innovator in accent lighting, LSI offers a complete range of permanent fade-free glass color filters, which are available in four stock diameters. All glass color filters are rimmed in a seamless aluminum ring and are slotted for heat expansion.



Size	Diameter	LSI Fixture Series	No.	Color	% of Light Transmission
AAA	2 3/8"	LumeLEX® 2020/2030/2031/2038, SSLCX16, SSL260	902	Medium Pink	36
			903	Deep Pink	37
AA	3"	LumeLEX® 2044, LumeLEX 2048	904	Flesh Pink	73
			906	Pale Lavender	14
A	3 1/2"	LumeLEX® 2060, SSL230, SSLCX30, SSLGR30CL	907	Surprise Pink	19
			908	Lilac	21
C	4 3/4"	LumeLEX® 2084, LumeLEX® 2088, SSL238, SSLCX36, SSLCX38, SSLGR38CL	910	Warm Red	10
			911	Strawberry	6
			912	Ruby	4
			913	Magenta	1
			914	Light Amethyst	25
			915	Medium Amethyst	16
			916	Deep Amethyst	4
			917	Olive	18
			918	Light Green	68
			920	Medium Green	25
			921	Deep Green	7
			922	Silver green	65
			923	Yellow Green	49
			924	Emerald Green	12
			925	Light Turquoise	68
			926	Medium Turquoise	40
			927	Deep Turquoise	17
			928	Light Blue	34
			930	Medium Blue	3
			932	Daylight	59
			933	Gene Moore Blue	18
			936	Grey	56
			937	Light Blue Green	17
			939	Light Amber	68
			940	Medium Amber	48
			941	Deep Amber	43
			942	Straw	78
			943	Gold	87
			944	Canary Yellow	84
			945	Lemon	81
			946	Pumpkin	32
			947	Tangerine	20
			948	Orange	23
			949	Pink Gold	54
			950	Bronze	48
			951	Brass	11
			952	Autumn Tan	11
			953	Leaf Brown	19
			954	Butter Pecan	3
			955	Toasted Almond	1

**Notes:**

1. Values given are approximate due to slight variations in glass color and thickness.


# COLOR MEDIA

## DICHROIC COLOR FILTERS

In addition to our complete line of glass color filters, LSI now offers dichroic glass color filters that achieve purer, more saturated, richer color by selective wavelength transmission. Since these filters reflect rather than absorb the unwanted color wavelengths, a higher intensity of colored light can be obtained with fewer or lower wattage fixtures. In addition, this selective transmission allows for very accurate color matching from filter to filter.

All standard LSI filter sizes are available in a wide palette of well chosen dichroic colors that can be used with all LSI fixtures that accept accessories.

LSI dichroic glass color filters have the added benefit of being rimmed for extra durability to allow for frequent usage without fear of breakage or edge chipping.

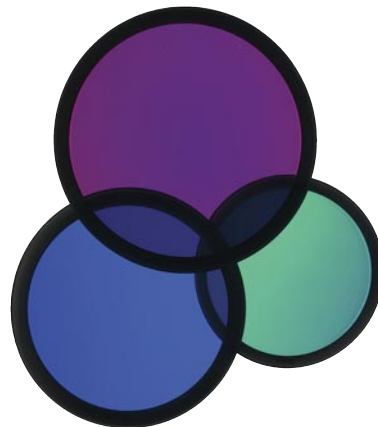

Size	Diameter	LSI Fixture Series	Technical Data	No.	Color	% of Light Transmission
AAA	2 3/8"	LumeLEX® 2020/2030/2031/2038, SSLCX16, SSL260	Dichroic color filters are created in a vacuum chamber by multi-layer vapor deposits of different minerals onto low expansion, chemically resistant Borosilicate glass.	2001	Light Pink	69
AA	3"	LumeLEX® 2044, LumeLEX 2048	Deposits are made in alternating layers of varying microscopic thickness which allow very narrow color wavelengths to be selectively transmitted and all other wavelengths to be reflected.	2002	Medium Pink	43
A	3 1/2"	LumeLEX® 2060, SSL230, SSLCX30, SSLGR30CL	LSI does not recommend using dichroic color filters with lamps or fixtures that have beam spreads greater than 40° because a secondary color aura is created by the wide angular transmitted wavelengths that are different than the desired color wavelength.	2003	Hot Pink	11
C	4 3/4"	LumeLEX® 2084, LumeLEX® 2088, SSL238, SSLCX36, SSLCX38, SSLGR38CL	Since there is mainly transmission and reflection of the color wavelengths by the dichroic filter and very little absorption, the dichroic filter can be used with many high temperature lights that normally would not accept color filters.	2004	Pale Pink	55
				2010	Deep Magenta	29
				2011	Lavender	24
				2012	Vivid Magenta	31
				2013	Lavender Accent	48
				2014	Lilac	37
				2015	Purple Fusion	12
				2020	Sky Blue	39
				2021	Sea Blue	39
				2022	Cyan	33
				2023	Light Blue Green	30
				2024	Primary Blue	24
				2025	Medium Red Blue	15
				2026	Deep Purple	16
				2027	Peacock Blue	53
				2028	Mediterranean Blue	20
				2029	Boost Blue	51
				2040	Light Yellow Green	64
				2041	Fern Green	47
				2042	Turquoise	35
				2043	Primary Green	31
				2044	Industrial Green	64
				2050	Yellow	80
				2051	Amber	71
				2052	Amber Blush	38
				2053	Bastard Amber	71
				2054	Goldenrod	63
				2055	Bright Straw	56
				2060	Medium Orange	51
				2061	Orange	44
				2070	Flame Red	27
				2071	Primary Red	25