

LX2038 • 120/277V • XICATO 9MM**Elegant fixed downlight designed specifically for the most demanding architectural applications**

- Designed for the Xicato XTM 9mm LED module up to 14 Watts, enabling narrow beams
- Extremely tight color consistency (less than 2 MacAdam Ellipses)
- System efficiency up to 37 lumens/watt
- 50,000 hour life to 70% lumen output, L70 at 95°F max ambient
- Field interchangeable optics (16° – 40°) modify the beam spread distribution
- Choice of color temperature
- Color Rendering Index (CRI) of either 98 (high) or 83 (standard)
- Choice of lumen outputs (delivered lumens)
- Tested to LM79 and LM80 Protocols, TM-30 available
- Hidden integral electronic driver compatible with reverse phase (ELV compatible) dimmers down to 10%
- Integral Dimming with built-in potentiometer also available
- Accessory holder accepts up to two size-AAA LSI filters and accessories
- Sturdy die-cast aluminum housing
- No UV or IR emissions; no mercury or lead
- On/off safety switch (on OE Track fitting)
- Finishes: LSI Black, White, and Silver
- Fixture weight: 3 lbs
- All modules are field replaceable


MOUNTING OPTIONS

Please review the **ORDERING INFORMATION** section on the next page on how to specify the following:


- LED Module
- LED Rating
- Color Temperature
- Optic - mm/beam spread
- Dimming
- Voltage
- Finish

LX2038-XXXXX-XXXXXX-0E-XXXXXX


Lexan Fitting for 1 and 2 circuit LSI Track. With On/Off switch.

**LX2038-XXXXX-XXXXXX-5E-XXXXXX**

Canopy for permanent mounting on standard 4" octagonal junction boxes. (2-1/8" deep)

**Other Options (Consult Factory):**

- Custom stems, specify length (4" – 48")
- Custom color, RAL palette
- Security/Worklite Fixture, use **—EF** as mounting option. (track mount only)

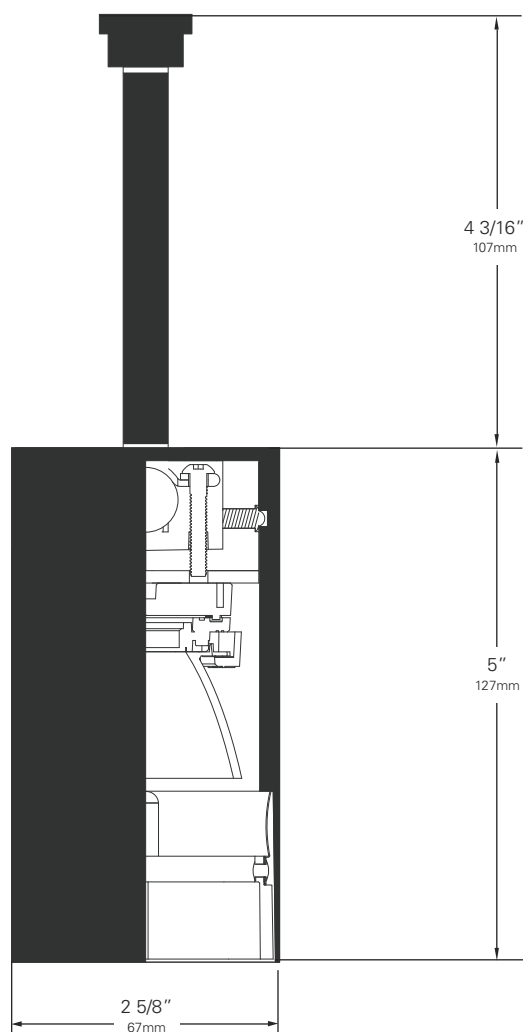LX2038 • 120/277V • XICATO 9MM**ORDERING INFORMATION****Xicato XTM 9mm Fixture**

1. Choose the desired LED Module
(TS9) for XTM (9mm)
2. Choose the letter code to designate the desired LED Rating
Lumens/CRI/Wattage
(07-98) for 700/98/13 **(09-83)** for 900/83/14
3. Choose the numeric code to designate the desired
Color Temperature
(27) for 2700K **(30)** for 3000K **(35)** for 3500K
(40) for 4000K For other CCT, consult factory
4. Use the following alpha-numeric code to designate the
Optic
(P1) for 50mm/16° **(P2)** for 50mm/24°
(P4) for 50mm/40°
5. Select your **Mounting Option**
(0E) Track Fitting
(5E) Canopy Fitting
6. Choose the letter code for **Dimming Type**
(TE) Trailing Edge (ELV Reverse Phase) (10%)
(ED) Integral Dimming (10%) (0E fitting only, 120/230V only)
7. Choose the desired **Voltage:**
(120) for 120V **(230)** for 220-240V
(277) for 277V

8. Choose a **Finish** for your fixture:
Black **(B)** White **(W)** Silver **(S)**

Example:

LX2038 - TS9 07-98 27 P1 - 0E - TE 120 B
FIXTURE LED MODULE LED RATING CCT OPTIC FITTING DIMMING VOLTAGE FINISH


9. Don't forget your Accessories!

Color Temperature & Center Point Tolerance

Color Temp	Center Point	Tolerance
2700K	2700K	+/- 40K
3000K	2950K	+/- 50K
3500K	3420K	+/- 60K
4000K	4000K	+/- 70K

Chromaticity Specifications

LED	R _a -CRI	R _f -Fidelity	R _g -Gamut Area
T19-TS9 - 83	83	78	101
T19-TS9 - 98	98	96	103

ACCESSORIES**Glass Color Filters AAA**

As the foremost innovator in accent lighting, LSI offers a complete range of permanent fade-free glass color filters, which are available in nine stock diameters.

Other accessories:

- **LX-P16-REF-CLR (50mm/16°)**
- **LX-P24-REF-CLR (50mm/24°)**
- **LX-P40-REF-CLR (50mm/40°)**
- **Cross Baffle LX2030**
- **Louver Hex AAA**
- **Spread Lenses AAA990, AAA992, AAA995, AAA996**
- **Beam Softener AAA998**
- **Light Blocking Screens AAA801S, AAA802S, AAA803S**
- **Color and Spread Gels AAA**
- **Backer Ring AAAB**

LX2038 • PERFORMANCE

The performance characteristics of the LumeLEX family of products can be customized based on the LED module and the optic (reflector) selected.

Each available LED module is defined by four characteristics – the color rendering index (CRI), the correlated color temperature (CCT), the power that it uses (watts), and its “available lumens.” Note that available lumens is a theoretical value that represents the light output of the module on its own – no fixture or optic attached.

In the LSI part number, the LED module is specified with a range of numbers that immediately follow the product series number. For example, in the part number LX2038-TS907-9827P1-0E-TE120B, the “**TS907-9827**” represents an LED module with an output of 700 lumens, a CRI of 98, a power usage of 13 watts and a color temperature of 2700K.

The available optics (reflectors) are characterized by size, beam angle, and in some cases the characteristics of the field angle (narrow or wide). The optic is specified by the two characters that follow the LED designation in the part number. For example, the “**P1**” in LX2038-TS907-9827P1-0E-TE120B is a 50mm diameter optic that has a 16-Degree beam.

Additional parameters, such as Center Beam Candle Power (CBCP), Delivered Lumens, and Efficiency (Lumens per Watt) are all shown in a table that is organized by LED module and optic combination.

CBCP = Center Beam Candle Power			
LED Rating	Optic (Reflector)		
Lumens/CRI/Wattage	P1	P2	P4
700/98/13	3726	1842	918
900/83/14	5589	2763	1377

Delivered Lumens			
LED Rating	Optic (Reflector)		
Lumens/CRI/Wattage	P1	P2	P4
700/98/13	336	348	342
900/83/14	504	522	513


Efficiency = Lumens Per Watt			
LED Rating	Optic (Reflector)		
Lumens/CRI/Wattage	P1	P2	P4
700/98/13	26	27	26
900/83/14	36	37	37

Absolute range of values are +/- 10% of typical value, and are for all color temperatures

LED Rating Lumens/CRI/Wattage SKU Code	700/98/13 07-98	900/83/14 09-83
Nominal Fixture Power (+/- 20%), Watts	13	14
Maximum Inrush Current Amps	10	10
Minimum Power Factor	0.90	0.90


Inrush current is instantaneous current drawn by the LED only when fixture is initially powered on or instantaneously changed from full dim to full bright. For more details see Dimming Application Sheet, IS-0119.

LX2038 • OPTICS




LX-P16-REF-CLR (P1) (50mm/16°)

Faceted specular metal optic.
Tool-less twist and lock
installation. Clear finish.



LX-P24-REF-CLR (P2) (50mm/24°)

Faceted specular metal optic.
Tool-less twist and lock
installation. Clear finish.



LX-P40-REF-CLR (P4) (50mm/40°)

Faceted specular metal optic.
Tool-less twist and lock
installation. Clear finish.

LX2038 • PHOTOMETRIC DATA

LED RATING: 09-83

P1-50mm DIA Optic

Beam Spread (minimum) **16°**
 Center Beam Candlepower **5589**
 CRI **83**


P2-50mm DIA Optic

Beam Spread (minimum) **24°**
 Center Beam Candlepower **2763**
 CRI **83**

P4-50mm DIA Optic


Beam Spread (minimum) **40°**
 Center Beam Candlepower **1377**
 CRI **83**

All Max. Footcandles at 0° Beam Axis

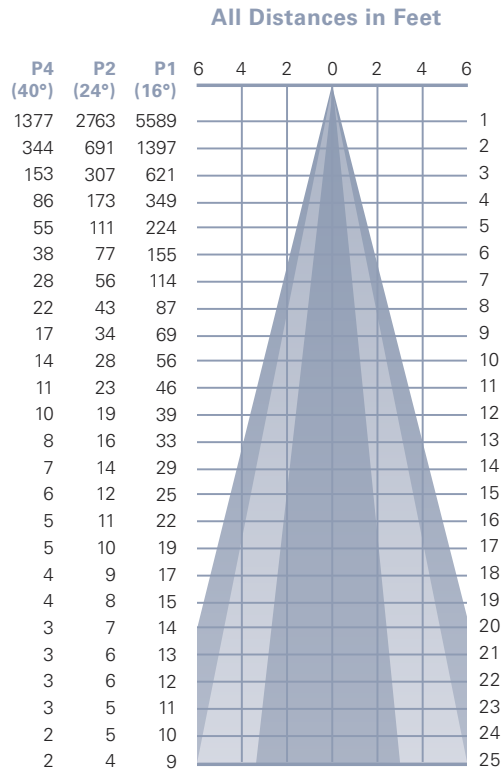

Photometric Data based on LED Rating: 09-83 (900 Lumens/83CRI/14watts)

LX2038 • ACCESSORIES



SPREAD LENSES AND BEAM SOFTENER

No.	Description	% of Light Transmission
AAA990	Spread Lens/Clear	83 (5°X 50°)
AAA992	Spread Lens/Clear	85 (5°X 30°)
AAA995	Spread Lens/Clear	83 (50°X 50°)
AAA996	Spread Lens/Clear	86 (45°X 50°)
AAA998	Beam Softener/Clear	80 (45°X 45°)



1' LIGHT BLOCKING SCREENS AAA


Stainless steel mesh screens used alone or in combinations will block from approximately 20% to 90% of the transmitted light without changing color temperature of the light.

No.	% of Light Blocked
AAA801S	20
AAA802S	30
AAA803S	40




LOUVER HEX AAA

1/8" thick Hexcell black metal louver used for thin profile.



BACKER RING AAA

Stainless steel ring to hold thin film gels when no other size AAA accessories are being used.



CROSS BAFFLE LX2030

Controls spill light and glare. Black finish.

1. Figures vary based upon LED module/optic being used and relationship of screen(s) to LED module/optic and to each other.

LX2038 • GELS

As the foremost innovator in accent lighting, LSI offers a complete range of pre-cut Gels to modify the spread and color of light for the LumeLEX LED Series.



LumeLEX® SPREAD GELS

Size: AAA	Spread Gel
GELL1-AAA	1° Spread Gel
GELL5-AAA	5° Spread Gel
GELL10-AAA	10° Spread Gel
GELL20-AAA	20° Spread Gel
GELL30-AAA	30° Spread Gel
GELL40-AAA	40° Spread Gel
GELL60-AAA	60° Spread Gel
GELL80-AAA	80° Spread Gel
GELL30B5-AAA	30° by 5° Spread Gel
GELL40B2-AAA	40° by 0.2° Spread Gel
GELL60B1-AAA	60° by 1° Spread Gel
GELL60B10-AAA	60° by 10° Spread Gel
GELL75B45-AAA	75° by 45° Spread Gel
GELL90B60-AAA	90° by 60° Spread Gel
GELR101-AAA	Beam Softener

LumeLEX® COLOR GELS

Size: AAA	Gel Color	Size: AAA	Gel Color
GELR2-AAA	Bastard Amber	GELR312-AAA	Canary
GELR7-AAA	Pale Yellow	GELR3204-AAA	Half Blue
GELR12-AAA	Straw	GELR331-AAA	Shell Pink
GELR13-AAA	Straw Tint	GELR383-AAA	Sapphire Blue
GELR14-AAA	Medium Straw	GELR397-AAA	Pale Grey
GELR21-AAA	Golden Amber	GELR2001-AAA	Storaro Red
GELR25-AAA	Orange Red	GELR2004-AAA	Storaro Green
GELR26-AAA	Light Red	GELR2009-AAA	Storaro Violet
GELR27-AAA	Medium Red	GELR3202-AAA	Full Blue
GELR57-AAA	Lavender	GELR3206-AAA	Third Blue
GELR62-AAA	Booster Blue	GELR3216-AAA	Eighth Blue (Boosts 3200K to 3300K)
GELR71-AAA	Sea Blue	GELR3318-AAA	Tough 1/8 Minusgreen
GELR72-AAA	Azure Blue	GELR3410-AAA	Roscosun (1/8 CTO) (Reduces 5500K to 4900K)
GELR91-AAA	Primary Green	GELR3441-AAA	Full Straw (CTS)
GELR97-AAA	Light Grey	GELR3443-AAA	Quarter Straw (CTS)
GELR98-AAA	Medium Grey	GELR4330-AAA	CalColor 30 Cyan
GELR101-AAA	Light Frost	GELR4415-AAA	CalColor 15 Green
GELR104-AAA	Tough Silk	GELR4490-AAA	CalColor 90 Green
GELR119-AAA	Lt. Hamburg Frost	GELR4860-AAA	CalColor 60 Pink
GELR121-AAA	Blue Diffusion	GELR4890-AAA	CalColor 90 Pink
GELR305-AAA	Rose Gold	GELR4930-AAA	CalColor 30 Lavender

*Backer Ring "AAA" required when no other "AAA" Accessories are being used.

COLOR MEDIA

COLOR FILTERS

As the foremost innovator in accent lighting, LSI offers a complete range of permanent fade-free glass color filters, which are available in nine stock diameters. All glass color filters are rimmed in a seamless aluminum ring and are slotted for heat expansion.



Size	Diameter	LSI Fixture Series	No.	Color	% of Light Transmission
AAA	2 3/8"	LumeLEX® 2020/2030/2031/2038, SSLCX16, SSL260, LumeLEX MAR-S	902	Medium Pink	36
			903	Deep Pink	37
			904	Flesh Pink	73
ZM	2 13/16"	LZ Zoom	906	Pale Lavender	14
			907	Surprise Pink	19
AA	3"	LumeLEX® 2024 (with LX2024-Holder or LX2024-Barndoor), LumeLEX® 2044, LumeLEX 2048	908	Lilac	21
			910	Warm Red	10
			911	Strawberry	6
			912	Ruby	4
A	3 1/2"	LumeLEX® 2060, SSL230, SSLCX30, SSLGR30CL, SSLGR36	913	Magenta	1
			914	Light Amethyst	25
B	4 1/4"	LumeLEX® MAR-L	915	Medium Amethyst	16
			916	Deep Amethyst	4
			917	Olive	18
C	4 3/4"	LumeLEX® 2084, LumeLEX® 2088, SSL238, SSLCX36, SSLCX38, SSLGR38CL	918	Light Green	68
			920	Medium Green	25
			921	Deep Green	7
			922	Silver green	65
			923	Yellow Green	49
			924	Emerald Green	12
			925	Light Turquoise	68
			926	Medium Turquoise	40
			927	Deep Turquoise	17
			928	Light Blue	34
			930	Medium Blue	3
			932	Daylight	59
			933	Gene Moore Blue	18
			936	Grey	56
			937	Light Blue Green	17
			939	Light Amber	68
			940	Medium Amber	48
			941	Deep Amber	43
			942	Straw	78
			943	Gold	87
			944	Canary Yellow	84
			945	Lemon	81
			946	Pumpkin	32
			947	Tangerine	20
			948	Orange	23
			949	Pink Gold	54
			950	Bronze	48
			951	Brass	11
			952	Autumn Tan	11
			953	Leaf Brown	19
			954	Butter Pecan	3
			955	Toasted Almond	1

Notes:

1. Values given are approximate due to slight variations in glass color and thickness.


COLOR MEDIA

DICHROIC COLOR FILTERS

In addition to our complete line of glass color filters, LSI now offers dichroic glass color filters that achieve purer, more saturated, richer color by selective wavelength transmission. Since these filters reflect rather than absorb the unwanted color wavelengths, a higher intensity of colored light can be obtained with fewer or lower wattage fixtures. In addition, this selective transmission allows for very accurate color matching from filter to filter.

All standard LSI filter sizes are available in a wide palette of well chosen dichroic colors that can be used with all LSI fixtures that accept accessories.

LSI dichroic glass color filters have the added benefit of being rimmed for extra durability to allow for frequent usage without fear of breakage or edge chipping.

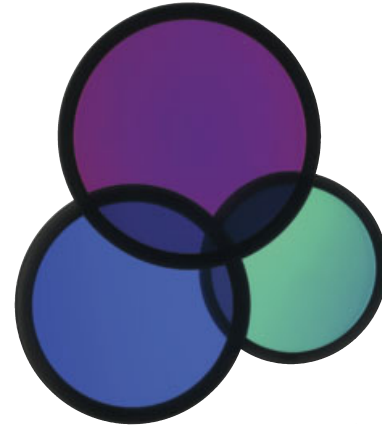

Size	Diameter	LSI Fixture Series	Technical Data	No.	Color	% of Light Transmission
AAA	2 3/8"	LumeLEX® 2020/2030/2031/2038, SSLCX16, SSL260, LumeLEX MAR-S	Dichroic color filters are created in a vacuum chamber by multi-layer vapor deposits of different minerals onto low expansion, chemically resistant Borosilicate glass.	2001	Light Pink	69
ZM	2 13/16"	LZ Zoom	Deposits are made in alternating layers of varying microscopic thickness which allow very narrow color wavelengths to be selectively transmitted and all other wavelengths to be reflected.	2002	Medium Pink	43
AA	3"	LumeLEX® 2024 (with LX2024-Holder or LX2024-Barndoor), LumeLEX® 2044, LumeLEX 2048	LSI does not recommend using dichroic color filters with lamps or fixtures that have beam spreads greater than 40° because a secondary color aura is created by the wide angular transmitted wavelengths that are different than the desired color wavelength.	2003	Hot Pink	11
A	3 1/2"	LumeLEX® 2060, SSL230, SSLCX30, SSLGR30CL, SSLGR36	Since there is mainly transmission and reflection of the color wavelengths by the dichroic filter and very little absorption, the dichroic filter can be used with many high temperature lights that normally would not accept color filters.	2004	Pale Pink	55
B	4 1/4"	LumeLEX® MAR-L		2010	Deep Magenta	29
C	4 3/4"	LumeLEX® 2084, LumeLEX® 2088, SSL238, SSLCX36, SSLCX38, SSLGR38CL		2011	Lavender	24
				2012	Vivid Magenta	31
				2013	Lavender Accent	48
				2014	Lilac	37
				2015	Purple Fusion	12
				2020	Sky Blue	39
				2021	Sea Blue	39
				2022	Cyan	33
				2023	Light Blue Green	30
				2024	Primary Blue	24
				2025	Medium Red Blue	15
				2026	Deep Purple	16
				2027	Peacock Blue	53
				2028	Mediterranean Blue	20
				2029	Boost Blue	51
				2040	Light Yellow Green	64
				2041	Fern Green	47
				2042	Turquoise	35
				2043	Primary Green	31
				2044	Industrial Green	64
				2050	Yellow	80
				2051	Amber	71
				2052	Amber Blush	38
				2053	Bastard Amber	71
				2054	Goldenrod	63
				2055	Bright Straw	56
				2060	Medium Orange	51
				2061	Orange	44
				2070	Flame Red	27
				2071	Primary Red	25