

# LX2048 • 120/277V • LED • COB • CONTROLTrack COMPATIBLE



**Elegant fixture designed specifically for the most demanding architecture applications.**


- 4° optic produces 70000 CBCP with 810 lumens at 15 watts
- System efficiency up to 25 lumens/watt
- Exceeds ANSI specifications by maintaining extremely tight color consistency over the life of the fixture
- Tested to LM79 and LM80 Protocols
- 50,000 hour life to 70% lumen output, L70 at 95°F max ambient
- 0-10V dimming allows for 2 zones of control on one circuit CONTROLTrack down to 10%
- DMX compatible with dimming below 1%
- Lutron EcoSystem compatible with dimming to 0.1% (Lutron Hi-Lume Premier 0.1% EcoSystem LED Driver)
- Lutron EcoSystem features soft-on, fade to black, smooth flicker-free dimming from 0-100% (Meets IEEE 1789 for flicker)
- Color Rendering Index (CRI) 90+
- Color Fidelity Index (R<sub>f</sub>) 92
- Gamut Area Index (R<sub>g</sub>) 102
- Color consistency, 2 MacAdam ellipses
- Accessory holder accepts up to two size-AA LSI accessories
- Backer Ring AAB (included) holds gel media when no other size AA accessory is being used
- No UV or IR emissions; no mercury or lead
- On/off safety switch (on CONTROLTrack fitting)
- Sturdy die-cast aluminum housing
- Self and wrench locking stem for vertical and horizontal focusing
- Finishes: LSI Black, White, and Silver
- Fixture weight: 3.5 lbs
- Fixed center stem
- Maximum stem length is 48"

## FIXTURE PART NUMBERS

Please review the **ORDERING INFORMATION** section on the next page as well as the **MOUNTING OPTIONS** on page 3 to create a part number for each fixture that specifies the following:


- LED Module
- LED Rating
- Color Temperature
- Optic (mm/beam spread)
- Fitting/Controls (Dimming)
- Voltage
- Finish

### PART NUMBER

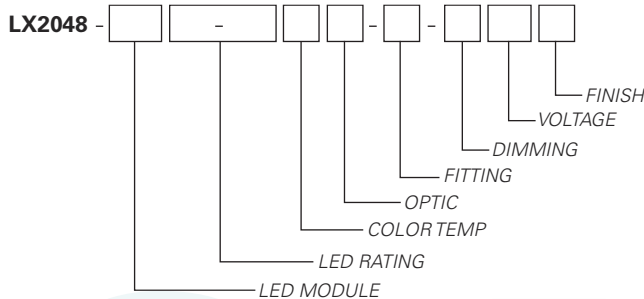

Example Part Number: **LX2048-ZE308-903004-CT3-DX-120W** is a fixture with a ZE3 LED module, 810 Lumen/90 CRI/15 Watt LED rating, 3000°K Color Temperature, 4° Optic, CT3 CONTROLTrack fitting with DMX Address knobs and DMX compatible control gear, 120V and a White finish.

# LX2048 • 120/277V • COB • CONTROLTrack COMPATIBLE

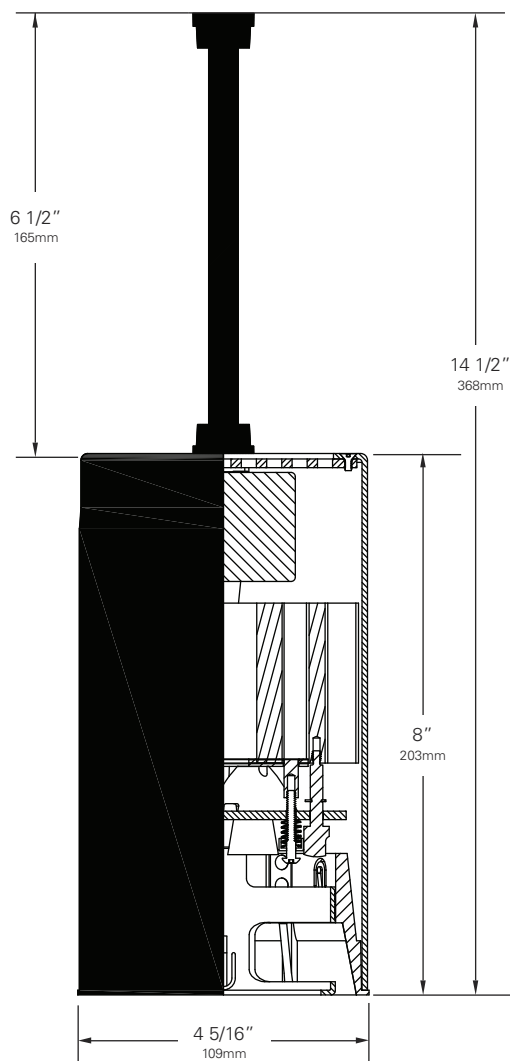

## COB ORDERING INFORMATION

### Base Fixture Model

LX2048-ZE3 (3X Array)

### LED Rating (Lumens/CRI/Wattage)

08-90 = 810/90/15

### Color Temperature

27= 2700K     30= 3000K

35= 3500K     40= 4000K

### Optic

04 = 35mm/ 4°

### Fitting/Controls (Dimming)

CT1-10 = CONTROLTrack Fitting & 0-10V (10%)

CT3-DX = CONTROLTrack Fitting & DMX (<1%)

CT5-L3 = CONTROLTrack Fitting & Lutron EcoSystem  
(0.1% soft on/off)

### Voltage

120 = 120V     230 = 220-240V     277 = 277V

### Finish

B = Black     W = White     S = Silver

### Example Part Number:

**LX2048-ZE3**    **08-90**    **30**    **04** - **CT3-DX**    **120**    **W**  
FIXTURE MODEL    LED RATING    COLOR TEMP    OPTIC    FITTING    VOLTAGE DIMMING    FINISH

### Other Options (Consult Factory):

- Custom Stems, specify length (4" - 48")
- Custom color, RAL palette

## Color Temperature & Center Point Tolerance

Color Temp	Center Point	Tolerance
2700K	2700K	+/- 40K
3000K	2950K	+/- 50K
3500K	3420K	+/- 60K
4000K	4000K	+/- 70K

## Chromaticity Specifications

LED	R <sub>a</sub> -CRI	R <sub>f</sub> -Fidelity	R <sub>g</sub> -Gamut Area
ZE3	90	92	102

# LX2048 • MOUNTING OPTIONS

FITTING	SIDE VIEW	STEM LENGTH VIEW
<p><b>CT1 CONTROLTrack Fitting</b></p>	<p>10 5/16" 262mm</p> <p>5/8" 16mm</p>	<p>7 5/16" 188mm</p> <p>4 1/4" 108mm</p>
<p><b>CT3 CONTROLTrack Fitting</b></p>	<p>10 5/16" 262mm</p> <p>1 3/4" 44mm</p>	<p>7 15/16" 201mm</p> <p>4 1/4" 108mm</p>
<p><b>CT5 CONTROLTrack Fitting</b></p>	<p>11 5/16" 288mm</p> <p>1 7/8" 48mm</p>	<p>7 5/16" 188mm</p> <p>4 1/4" 108mm</p>

# LX2048 • PERFORMANCE

The performance characteristics of the LumeLEX family of products can be customized based on the LED module and the optic selected.

Each available LED module is defined by five characteristics – the color rendering index (CRI), the correlated color temperature (CCT), the power that it uses (watts), its “available lumens,” and beam spread. Note that available lumens is a theoretical value that represents the light output of the module on its own – no fixture or optic attached.

In the LSI part number, the LED module is specified with a letter and a number that immediately follow the product series number. For example, in the part number LX2048-ZE308-903004-CT3-DX120W, the “ZE308-903004” represents an LED module with an output of 810 lumens, a CRI of 90, a power usage of 15 watts, a color temperature of 3000K, and a 4-degree beam.

Additional parameters, such as Center Beam Candle Power (CBCP), Delivered Lumens, and Efficiency (Lumens per Watt) are all shown in a table that is organized by LED module and optic combination.

CBCP = Center Beam Candle Power	
LED Module	Optic (Reflector)
<b>Lumens/CRI/Wattage</b>	<b>04</b>
<b>810/90/15</b>	70,000

Delivered Lumens	
LED Module	Optic (Reflector)
<b>Lumens/CRI/Wattage</b>	<b>04</b>
<b>810/90/15</b>	370

Efficiency = Lumens Per Watt	
LED Module	Optic (Reflector)
<b>Lumens/CRI/Wattage</b>	<b>04</b>
<b>810/90/15</b>	25

*Absolute range of values are +/- 10% of typical value, and are for all color temperatures*

LED Module Lumens/CRI/Wattage Letter Code	810/90/15 08-90
Nominal Fixture Power (+/- 20%), Watts	15
Maximum Inrush Current, Amps	10
Minimum Power Factor	0.92

*Inrush current is instantaneous current drawn by the LED only when fixture is initially powered on or instantaneously changed from full dim to full bright. For more details see Dimming Application Sheet, IS-0119.*

# LX2048 • PHOTOMETRIC DATA


LED RATING: 08-90

Beam Spread (minimum)  
Center Beam Candlepower  
CRI

**4°**  
**70,000**  
**90+**





LED RATING: 08-90

All Distances in Feet

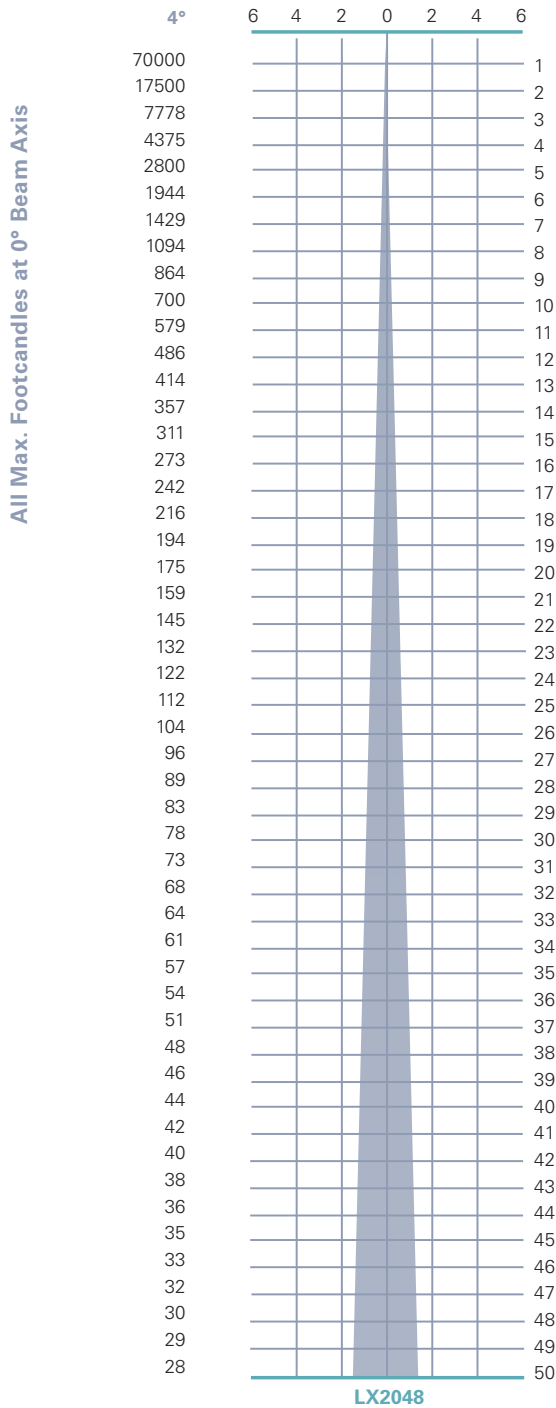

Photometric Data based on LED Rating:  
08-90 (810 Lumens/90CRI/15watts)

# LX2048 • ACCESSORIES

 <p><b>1 LIGHT BLOCKING SCREENS AA</b></p> <p>Stainless steel mesh screens used alone or in combinations will block from approximately 20% to 90% of the transmitted light without changing color temperature of the light.</p> <table border="1"> <thead> <tr> <th>No.</th> <th>% of Light Blocked</th> </tr> </thead> <tbody> <tr> <td><b>AA801S</b></td> <td>20</td> </tr> <tr> <td><b>AA802S</b></td> <td>30</td> </tr> <tr> <td><b>AA803S</b></td> <td>40</td> </tr> </tbody> </table>	No.	% of Light Blocked	<b>AA801S</b>	20	<b>AA802S</b>	30	<b>AA803S</b>	40	 <p><b>LOUVER HEX AAB</b></p> <p>1/8" thick Hexcell black metal louver used for thin profile. Black finish.</p>
No.	% of Light Blocked								
<b>AA801S</b>	20								
<b>AA802S</b>	30								
<b>AA803S</b>	40								
 <p><b>HOOD-EXT-LX44-NXB-X</b></p> <p>Cylindrical metal hood controls spill light and glare. Specify finish.</p>	 <p><b>BACKER RING AAB</b></p> <p>Aluminum ring to hold gel when no other size AA accessories are being used. Black finish.</p>								

1. Figures vary based upon LED Module/Optic being used and relationship of screen(s) to LED Module/Optic and to each other.

# LX2048 • GELS

As the foremost innovator in accent lighting, LSI offers a complete range of pre-cut Gels to modify the spread and color of light for the LumeLEX LED Series.



## LumeLEX® SPREAD GELS

Size: AA (76 mm diameter)	Spread Gel
GEL-L1-AA	1° Spread Gel
GEL-L5-AA	5° Spread Gel
GEL-L10-AA	10° Spread Gel
GEL-L20-AA	20° Spread Gel
GEL-L30-AA	30° Spread Gel
GEL-L40-AA	40° Spread Gel
GEL-L60-AA	60° Spread Gel
GEL-L80-AA	80° Spread Gel
GEL-L30B5-AA	30° by 5° Spread Gel
GEL-L40B2-AA	40° by 0.2° Spread Gel
GEL-L60B1-AA	60° by 1° Spread Gel
GEL-L60B10-AA	60° by 10° Spread Gel
GEL-L75B45-AA	75° by 45° Spread Gel
GEL-L90B60-AA	90° by 60° Spread Gel
GEL-R101-AA	Beam Softener

## LumeLEX® COLOR GELS

Size: AA (76 mm diameter)	Gel Color	% of Light Transmission	Size: AA (76 mm diameter)	Gel Color	% of Light Transmission
GEL-R2-AA	Bastard Amber	78	GEL-R312-AA	Canary	85
GEL-R7-AA	Pale Yellow	96	GEL-R331-AA	Shell Pink	68
GEL-R12-AA	Straw	88	GEL-R383-AA	Sapphire Blue	4
GEL-R13-AA	Straw Tint	78	GEL-R397-AA	Pale Grey	70
GEL-R14-AA	Medium Straw	68	GEL-R2001-AA	Storaro Red	12
GEL-R21-AA	Golden Amber	43	GEL-R2004-AA	Storaro Green	15
GEL-R25-AA	Orange Red	14	GEL-R2009-AA	Storaro Violet	3
GEL-R26-AA	Light Red	12	GEL-R3202-AA	Full Blue	36
GEL-R27-AA	Medium Red	4	GEL-R3204-AA	Half Blue	52
GEL-R57-AA	Lavender	24	GEL-R3206-AA	Third Blue	64
GEL-R62-AA	Booster Blue	54	GEL-R3216-AA	Eighth Blue (Boosts 3200K to 3300K)	81
GEL-R71-AA	Sea Blue	30	GEL-R3318-AA	Tough 1/8 Minusgreen	89
GEL-R72-AA	Azure Blue	44	GEL-R3410-AA	Roscocolor (1/8 CTO) (Reduces 5500K to 4900K)	92
GEL-R91-AA	Primary Green	7	GEL-R3441-AA	Full Straw (CTS)	50
GEL-R97-AA	Light Grey	50	GEL-R3443-AA	Quarter Straw (CTS)	81
GEL-R98-AA	Medium Grey	25	GEL-R4330-AA	CalColor 30 Cyan	63
GEL-R101-AA	Light Frost	N/A	GEL-R4415-AA	CalColor 15 Green	67
GEL-R104-AA	Tough Silk	N/A	GEL-R4490-AA	CalColor 90 Green	25
GEL-R119-AA	Lt. Hamburg Frost	N/A	GEL-R4860-AA	CalColor 60 Pink	46
GEL-R121-AA	Blue Diffusion	N/A	GEL-R4890-AA	CalColor 90 Pink	38
GEL-R305-AA	Rose Gold	75	GEL-R4930-AA	CalColor 30 Lavender	47

\* Backer Ring AAB required to hold gels when no other rimmed "AA" accessories are used.

Type	ROSCO #	ROSCO Description	Resulting CCT
Amber Filters Lower CCT	3420	Double CTO	1531
	3407	Sun CTO	1999
	3401	Sun 85	2154
	3411	Sun 3/4 CTO	2154
	3408	Sun 1/2 CTO	2414
	3409	Sun 1/4 CTO	2664
	3410	Sun 1/8 CTO	2830
	3114	UV Filter	2930
Blue Filters Raise CCT	3220	Double Blue	N/A
	3202	Full Blue	4942
	3203	Three-Quarter Blue	4286
	3204	Half Blue	3769
	3206	Third Blue	3517
	3208	Quarter Blue	3297
	3216	Eighth Blue	3112